


MOD. RR3-Z-PL

Circular-Knitting-Machine



Rundstrickmaschinen
Circular Knitting Machines
Machine a tricoter circulaire
Tricofosas circulares
Macchine circolari per maglieria



Wirkmaschinen
Warp Knitting Machines
Machine chaines
Tricofosas por urdimbre
Telai per maglia indemagliabile



Flecht-/Spiralisiermaschinen
Braiders/Spiralizing Machines
Machine á Tresser/Spiralizer
Trenzadoras/Spiralatuçe
Treciatrici/Espiraladora



Sondermaschinen
Special Machines
Machine spécialité
Macchine speciale
Máquina especial



MOD. RR3-Z-PL

Machine specifications



RR3-Z-PL-10"



RR3-Z-PL-15"



RR3-Z-PL-32"



RR3-Z-PL-32"



Mit stehendem Schlossmantel und rotierendem Zylinder

Einsatzgebiete:

Diese Strickmaschine wird zur Herstellung von Rechts-Links- Gestrück, Filter / Sitzbezüge / techn. Gestrücke/ Bandagen, Plüschgestricke usw. eingesetzt.

Maschinenausführung:

Der Maschinenantrieb über Frequenzumrichter Elektromotor mit 0,55 –1,5 KW, je nach Strickkopfdurchmesser . Schnellstop durch elektromagnetische Bremse.

Das Gestrück wird über die Aufwickelvorrichtung nach unten abgezogen. Die Aufwickelvorrichtung kann bis zu einem Durchmesser von 600 mm die Ware aufwickeln. Die Abzugsspannung und Wickelspannung werden über eine Tänzersteuerung elektronisch stufenlos eingestellt.

Platinenschlossverstellung:

- Abschlagpunkt
- Abschlagtiefe

EXTRAS:

- Zentrale Maschenverstellung
- Der Einbau eines Meterzählers ist möglich
- Fadenzuführgeräte für die verschiedensten Einsatzfälle
- Schneideinheit zum Ablängen von Gestrückteilen
- Schneideinheit zum Längsschnitt des Gestrücks
- Ringelapparat
- Mehrfußtechnik
- zusätzlicher Warenabzug

Farbe: Hellelfenbein RAL 1015

Konstruktionsänderung vorbehalten!

With fixed cam box and rotating cylinder

Application:

This machine is intended for the production of single jersey fabric, such as bandaging, technical and plush fabrics.

Machine-Specification:

Machine is driven by an electric motor of 0,55 KW or 2,5 KW, (depending on head size), whose speed is infinitely variable via a frequency modulator. An electromagnetic-brake ensures that the machine is brought to a stop very quickly.

The fabric is drawn down by an infinitely variable roll-up mechanism. The fabric is wound onto a roll of up to 600 mm diameter. The tension of the winding is stepless electronically controlled by a dancer-tevice.

Sinker cam adjustment:


- sinker press point
- sinker press in

OPTIONAL:

- Central stitch adjustment
- A fabric length counter can be fitted
- Yarn tension controller could be adapted
- Cutting unit to cut the fabric pieces to length
- Cutting unit to slice the fabric lengthwise
- Striping device
- Multi-feed-needles
- Extra take-down device

Colour: light ivory RAL 1015

Constructional alteration to change without notice.



MOD. RR3-Z-PL

Machine fabric samples



Rohr- /Kanalsanierung Inliner
Process Pipe/ Sewer liner




Plüschware für Automobil
Plush material for automotive



Automobiltürkantenschutz
Auto door edge protection




Topfschrubber
Pot scrubber

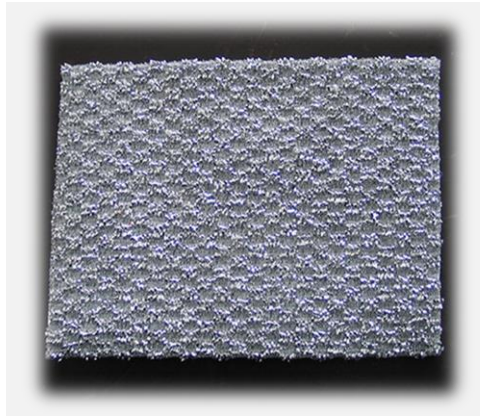

Topfschrubber
Pot scrubber



Offset Walzenbezüge
Offset roller covers



Plüschware für Automobil
Plush material for automotive

