


MOD. RR3-Z-R-1s-10

Circular Knitting Machine



Rundstrickmaschinen
Circular Knitting Machines
Machine a tricoter circulaire
Tricofosas circulares
Macchine circolari per maglieria



Wirkmaschinen
Warp Knitting Machines
Machine chaines
Tricofosas por urdimbre
Telai per maglia indemagliabile



Flecht-/Spiralisiermaschinen
Braiders/Spiralizing Machines
Machine á Tresser/Spiralizer
Trenzadoras/Spiralatuçe
Trecciatrici/Espiradora




Sondermaschinen
Special Machines
Machine spécialité
Macchine speciale
Máquina especial




MOD. RR3-Z-R-109-10s


Circular Knitting Machine

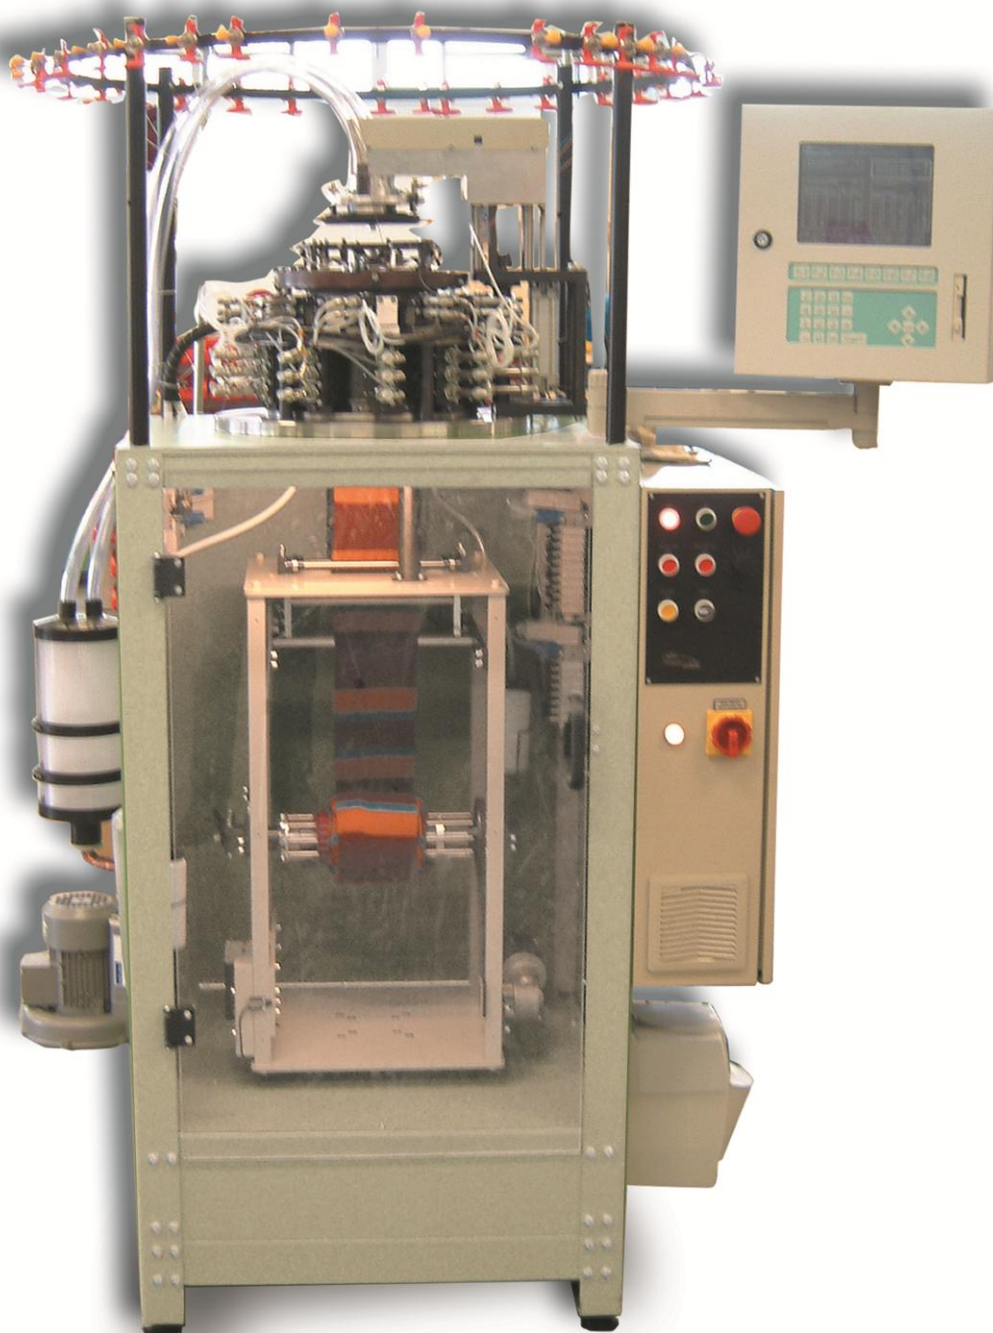

Rundstrickmaschinen
Circular Knitting Machines
Machine a tricoter circulaire
Tricofosas circulares
Macchine circolari per maglieria



Wirkmaschinen
Warp Knitting Machines
Machine chaines
Tricofosas por urdimbre
Telai per maglia indemagliabile



Flecht-/Spiralisiermaschinen
Braiders/Spiralizing Machines
Machine á Tresser/Spiralizer
Trenzadoras/Spiralatuçe
Trecciatrici/Espiradora



Sondermaschinen
Special Machines
Machine spécialité
Macchine speciale
Máquina especial




MOD. RR3-Z-RJ-109-4s/8s

Circular Knitting Machine



Rundstrickmaschinen
Circular Knitting Machines
Machine à tricoter circulaire
Tricofosas circulares
Macchine circolari per maglieria



Wirkmaschinen
Warp Knitting Machines
Machine chaines
Tricofosas por urdimbre
Telai per maglia indemagliabile



Flecht-/Spiralisiermaschinen
Braiders/Spiralizing Machines
Machine à Tresser/Spiralizer
Trenzadoras/Spiralatuçe
Trecciatrici/Espiraladora



Sondermaschinen
Special Machines
Machine spécialité
Macchine speciale
Máquina especial



Machine Specifications

mit stehendem Schlossmantel und rotierendem Zylinder

Einsatzgebiete:

Diese Maschine wird zur Herstellung von mehrfarbigen geringelten Mützen in Rechts-Links-Gestrick oder als Musterungsmaschine eingesetzt. Verschiedene Muster können über eine Jacquard-Einrichtung (3 Wege) hergestellt werden. (Abhängig vom Maschinentyp)

Der Maschinenantrieb erfolgt über einen frequenzgesteuerten Elektromotor. Die Maschine lässt sich über eine elektromagnetische Bremse schnell stoppen, wobei eine automatische Stoppschaltung auch über die Fadenwächter, die Türschaltung und die Gestrick-Überwachung erfolgen kann.

Maschinenausführungen:

RR3-Z-R-1s

- 1-systemige Ringelmaschine mit 5-fachem Ringelapparat

RR3-Z-R-109-10s

- 10-systemige Ringelmaschine mit **einstellbarem Überschnitt** (3-6 Nadeln) durch Wechsel der Farbe von einem System zum nächsten. Dadurch wird ein sauberer, konstanter Fadenwechsel erlaubt.

RR3-Z-RJ-109-4s/8s

- 4/8-systemige Jacquardmaschine mit 4-fachem Ringelapparat zur Herstellung von beliebigen Mustern. Die Drei-Wege-Technik ermöglicht eine Vielzahl von Fang-Mustern. Eine Besonderheit ist, dass die Fäden bei längeren Mustern in Fang abgebunden werden können. Vollelektronisch vier oder mehr Farben mit Einzelnadelauswahlprogrammierung mit handelsüblichen Zeichenprogrammen z.B. Paintbrush, Corel Draw usw. Übergabe des Programms in PCX-Format an die Maschinensteuerung. (Industrie PC).

- Das Gestrick wird mit einer elektronisch regelbaren Aufwickelvorrichtung abgezogen und bis zu einem max. Durchmesser von 600 mm aufgewickelt.

Extra:

- Klemm- und Schneidevorrichtung für die Fäden
- Absaugeinrichtung für Restfäden mit Filterkorb
- Vakuumpumpe zum Absaugen von Fäden
- programmierbare Maschenverstellung
- Öleinrichtung
- Erhöhung der Systemzahl

Maschinengrößen:

Strickkopfdurchmesser : 6" - 22"
Teilung : 4 - 28

Farbe: Hellelfenbein RAL 1015

Konstruktionsänderungen vorbehalten

with fixed cambox and rotating cylinder

Application:

This machine is intended for the production of multi-coloured hats in single-jersey or is used for a sampling-machine. The design can be produced by a Jacquard-device with 3-Way-technology. (depending on machine-type)

The machine drives by a frequency controlled electro-motor. The machine can be stopped quickly by an electro-magnetic brake. The automatic brake can also be installed for stop motion, door control and fabric guard.

Machine-Specification:

RR3-Z-R-1s

- single feed stripping machine with 5-fold stripping device

RR3-Z-R-109-10s

- 10-feed striping machine device **with adjustable join** (3-6 needles) by change of colour from one system to the next. A clean constant colour-change is possible.

RR3-Z-RJ-109-4s/8s

- 4/8-feed Jacquard-machine with 4-fold striping device for production of available pattern. The three way-technic facilitates a great number of tuck samples. A special feature is that longer threads can be fix by tuck. Full electronically four or more colour-jacquard-control with single needle selection. Programming with usual drawing-program, for example: Paintbrush, Corel draw etc. Handing-over of the program in PCX-format to the machine control (industry PC)

- The fabric is taken down by an electronically adjustable rolling device and is rolled up to a max. dial of 600 mm

Optional:



- Clamping and cutting device for the thread
- Air sucking device for remaining threads with basket
- Vacuum pump for air sucking of remaining threads
- programmable stitch size adjustment
- oiler
- Increase of number of feeders

Machine Sizes:

Knittinghead dials : 6" - 22"
Gauge : 4 - 28

Colour: light ivory RAL 1015

Constructional Alteration to change without notice.



MOD. RR3-Z-R

Machine Fabric Samples



Mütze
Cap



Hut
Hat



Mütze/Schal
Cap/Scarf



Mütze
Cap



Mützensortiment
Range of caps



Mütze/Schal
Cap/Scarf



Skimütze
Ski cap



Skimütze
Ski cap



Skimütze
Ski cap

