

# MOD. R/RV/RR3-Z-10"


Circular knitting machine



Rundstrickmaschinen  
**Circular Knitting Machines**  
Machine a tricoter circulaire  
Tricofosas circulares  
Macchine circolari per maglieria



Wirkmaschinen  
**Warp Knitting Machines**  
Machine chaines  
Tricofosas por urdimbre  
Telai per maglia indemagliabile



Flecht-/Spiralisiermaschinen  
**Braiders/Spiralizing Machines**  
Machine á Tresser/Spiralizer  
Trenzadoras/Spiralatuçe  
Trecciatrici/Espiraladora




Sondermaschinen  
**Special Machines**  
Machine spécialité  
Macchine speciale  
Máquina especial



# MOD. R/RV/RR3-Z-10"






## Machine specifications

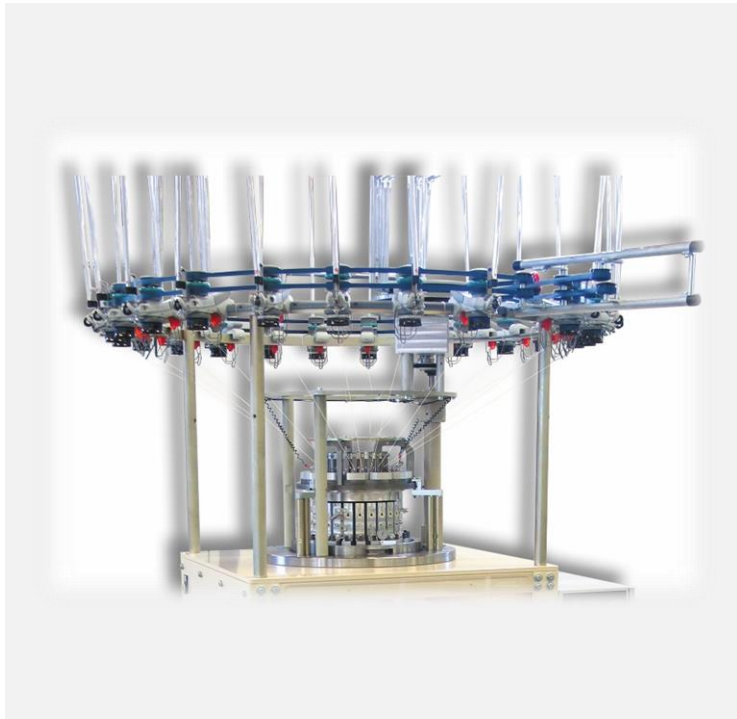

RR3-Z with sinkers



RV-Z with stitch-down-holder



# MOD. R/RV/RR3-Z-10"

## Machine specifications

### Rundstrickmaschine mit stehendem Schlossmantel und rotierendem Zylinder

#### Einsatzgebiete:

Die Strickmaschine wird zur Herstellung von Rechts-Links-Gestrick, Filter / Sitzbezüge / techn. Gestricke / Spezialbandagen, Plüschgestricke usw. eingesetzt.

#### Maschinenausführung:

R-Z	Maschine ohne Platinenabschlag
RV-Z	Maschine mit Niederhalter
RR3-Z	Maschine mit Platinenabschlag

Der Maschinenantrieb über Frequenzumrichter Elektromotor mit 0,55 –1,5 KW, je nach Strickkopfdurchmesser . Schnellstop durch elektromagnetische Bremse.

Das Gestrick wird über die Aufwickelvorrichtung nach unten abgezogen. Die Aufwickelvorrichtung kann bis zu einem Durchmesser von 600 mm die Ware aufwickeln. Die Abzugsspannung und Wickelspannung werden über eine Tänzersteuerung elektronisch stufenlos eingestellt.

#### Extras:

- Zentrale Maschenverstellung
- Der Einbau eines Meterzählers ist möglich
- Fadenzuführgeräte für die verschiedensten Einsatzfälle
- Schneideinheit zum Ablängen von Gestrickteilen
- Schneideinheit zum Längsschnitt des Gestricks
- Schiebernadel
- Ringelapparat
- Mehrfußtechnik
- zusätzlicher Warenabzug

Farbe: Hellelfenbein RAL 1015

Konstruktionsänderung vorbehalten!

### Circular knitting machine with fixed cam box and rotating cylinder

#### Application:

This machine is intended for the production of single jersey fabric, such as bandaging, technical and plush fabrics.

#### Machine specification:

R-Z	Machine without sinkers
RV-Z	Machine with stitch-down-holder
RR3-Z	Machine with sinkers

Machine is driven by an electric motor of 0,55 KW or 2,5 KW, (depending on head size), whose speed is infinitely variable via a frequency modulator. An electromagnetic-brake ensures that the machine is brought to a stop very quickly.



The fabric is drawn down by an infinitely variable roll-up mechanism. The fabric is wound onto a roll of up to 600 mm diameter. The tension of the winding is stepless electronically controlled by a dancer-tevice.

#### Optional:

- Central stitch adjustment
- A fabric length counter can be fitted
- Yarn tension controller could be adapted
- Cutting unit to cut the fabric pieces to length
- Cutting unit to slice the fabric lengthwise
- Compound needle
- Striping device
- Multi-feed-needles
- Extra take-down device

Colour: light ivory RAL 1015

Construction changes may be made without notice!




# MOD. R/RV/RR3-Z-10"

## Machine fabric samples




Rechts-Links plattiert  
Single Jersey plating

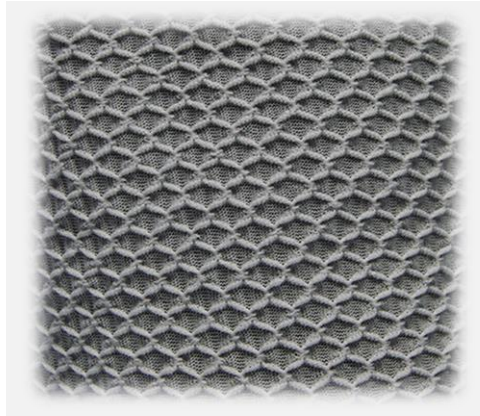

Musterbeispiel  
Pattern example



elast. Verpackungsschlauch  
elastic knitting hose

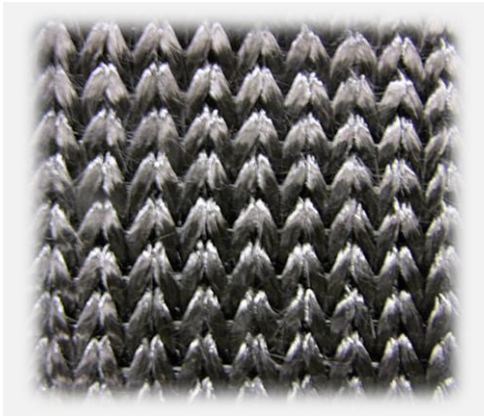

Kohlefaserverarbeitung  
Carbon fibre converting



Verbandsstoffschlauch  
Medical bandages



Fleischverpackung  
Meat packing



Fleischverpackung  
Meat packing



Filterschlauch  
Filter tube



Glasfaserarmierung  
Fibre glass reinforcement

