

MOD. RR2-Z-UHP-109-Bellaripp -01

Circular Knitting Machine



Rundstrickmaschinen
Circular Knitting Machines
Machine à tricoter circulaire
Tricofosas circulares
Macchine circolari per maglieria



Wirkmaschinen
Warp Knitting Machines
Machine chaines
Tricofosas por urdimbre
Telai per maglia indemagliabile



Flecht-/Spiralisiermaschinen
Braiders/Spiralizing Machines
Machine à Tresser/Spiralizer
Trenzadoras/Spiralatuçe
Trecciatrici/Espiradora



Sondermaschinen
Special Machines
Machine spécialité
Macchine speciale
Máquina especial




MOD. RR2-Z-UHP-109-Bellaripp -02

Circular Knitting Machine



Rundstrickmaschinen
Circular Knitting Machines
Machine à tricoter circulaire
Tricofosas circulares
Macchine circolari per maglieria



Wirkmaschinen
Warp Knitting Machines
Machine chaines
Tricofosas por urdimbre
Telai per maglia indemagliabile



Flecht-/Spiralisiermaschinen
Braiders/Spiralizing Machines
Machine à Tresser/Spiralizer
Trenzadoras/Spiralatuçe
Trecciatrici/Espiradora



Sondermaschinen
Special Machines
Machine spécialité
Macchine speciale
Máquina especial



Machine Specifications

Einsatzgebiet:

Herstellung von Leibweiten-Ripp-Unterwäsche mit Umhängemusterauswahl über Auswahlplatinen im Zylinder. (Bellaripp).

Maschinenausführung:

- Rippmaschine mit 2:2 Nadelbesetzung
- Zusätzliche Umhängeplatinen im Zylinder zum Umhängen der Rippmasche auf die Zylindermasche ermöglichen eine beliebige LochmusterAuswahl.
- Die Umhängeplatinen werden über eine elektronische Einzelnadelauswahl selektiert / WAC-System.
- Die Programmierung erfolgt über die Steuerung MS-109
- Das Dateiformat ist PCX / BMP und kann mit einem handelsüblichen Zeichenprogramm z. B. Paintbrush / Paintnet oder anderen Programmiersystemen erstellt werden

Durchmesser : 15" / 16" / 17" / 18"

Drehzahl : 65 / 60 / 55 / 50 U/min

Teilung : 2 x 14 / 2 x 15 / 2 x 16

- Die Ware kann gewickelt oder in einen herausnehmbaren Warenkorb abgelegt werden
- Öler, Nadelzungenwächter, Aufhockabsteller, Abblaseeinrichtung für die Rippscheibe und Zylinder,
- Die Rippscheibe kann so weit verstellt werden, dass zuerst der Zylinder angestrickt wird und danach sofort in Ripp weitergestrickt werden kann.

- Extra:

- Zusätzliche Rippschloss-Schaltungen ermöglichen die Erweiterung der Musterungen.
- Zusätzliche Abblaseeinrichtung für die Fadenführer durch die Rippachse
- Spulengatter in verschiedenen Ausführungen
- Fournisseur SFE wird für die Strickfäden empfohlen

Farbe: Hellelfenbein RAL 1015

Konstruktionsänderungen vorbehalten!

Application:

Production of body-rib-underwear with transfer-selection via transfer selection sinkers in the cylinder (Bellaripp)

Machine-Specification:

- Rib-machine with 2:2 needle setup.
- Additional jack transfers in the cylinder for transfer of the rib-stitch to the cylinder-stitch grant various patterning possibilities.
- The jack transfers will be selected through an electronically individual needle selection / WAC-System.
- Programming through computer MS-108
- The file-format PCX / BMP with common drawing programs, such as Paintbrush / Paintnet or other knitting pattern programming systems.

Diameter : 15" / 16" / 17" / 18"

Speed : 65 / 60 / 55 / 50 U/min

Gauge : 2 x 14 / 2 x 15 / 2 x 16

- The knitted fabric can be winded up or placed into a mobile container.
- Oiler, needle-latch-guard, loading stop-motion, blowing device for dial-plate and cylinder.
- The dial cam can be adjusted that way, that the cylinder starts knitting first and than the knitting procedure will be continued in rib.

Options:

- additional rib-cam selection for further pattern
- additional blowing device for the yarn feeder through the dial axis.
- Bobbin creel in various designs
- Yarn-feed-unit SFE is recommended for the machine

Colour: light ivory RAL 1015

Constructional alteration to change without notice




MOD. RR2-Z-UHP-109-Bellaripp

Machine Fabric Samples



Transfersystem
Transfersystem

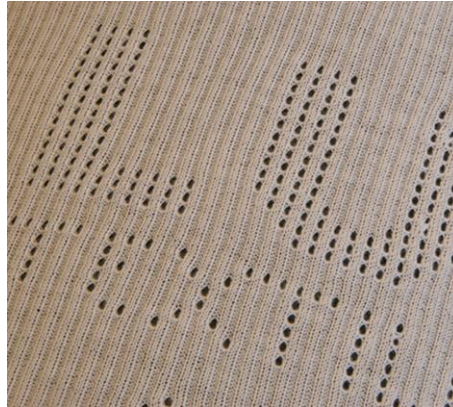

Bellaripp
Bella ripp



Lochmuster 2:2
Hole-Pattern 2:2



Transfer Muster
Transfer Pattern

